

CPD502A



MPEG-4 4CH DVR

● Features

MPEG4/MJPEG DVR Technology:

- Compression format providing crystal clear images with real time performance

Multiplex:

- Allows live display, record, playback, backup and network operation at the same time

Long-Recording Hours:

- 500GB HDD can record more than 170 days (4CH, CIF Best Quality, 60FPS)

Backup Function:

- Supports DVD writer, USB flash drives and network remote recording & backup

Remote Surveillance:

- Remote surveillance with the licensed software AP and IE browser
- Web surveillance supports 5 users simultaneously

Intelligent Motion Trigger Recording:

- R.E.T.R. (Remote Event Trigger Recording)
- With advanced settings for motion detection, scheduled motion detection recording (4 different adjustable factors for the motion detection sensitivity) and convenient search function, customized security environment is achieved
- Alarm triggered recording will send alerts with images to the designated e-mails and FTP address
- Supports pre-alarm recording (8MB)

Covert Recording:

- A mask replaces the live image with a blank screen, and the monitor shows nothing but recording is still on


A/V Support:

- Supports 2 audio-in, 1 audio-out to record sounds
- Supports VGA converter (optional)

General:

- Supports multi-language OSD
- System auto recovery after power reconnected
- Supports IR remote control, PTZ camera operations through RS-485, and PTZ Hot Point function
- Supports daylight-saving function
- Supports manual / timer / motion / alarm / remote recording functions
- Watermark function ensures authentication of the recorded images
- Supports TCP/IP, PPPoE, DHCP and DDNS network connection

● Rear Panel

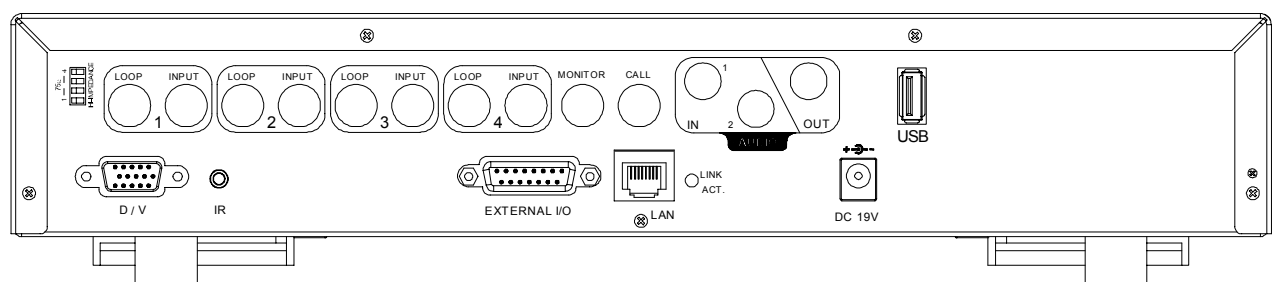

CPD502A

MPEG-4 4CH DVR

● Specifications



Specifications	CPD502A
Video System	NTSC / PAL (switchable)
Video Compression Format	Frame: MPEG 4 ; CIF: MPEG4
Video Input	4 Channels. Composite video signal 1 Vp-p 75Ω BNC
Video Loop Out	4 Channels. Composite video signal 1 Vp-p 75Ω BNC
Video Output	Main Monitor Output: Composite video signal 1 Vp-p 75Ω BNC Call Monitor Output: Composite video signal 1 Vp-p 75Ω BNC
Maximum Recording Rate	Frame: 720x480 pixels with 30 IPS <NTSC> / 720x576 pixels with 25 IPS <PAL> CIF: 352x240 pixels with 120 IPS <NTSC> / 352x288 pixels with 100 IPS <PAL>
Adjustable Recording Speed	Frame: 30, 15, 7, 3 IPS <NTSC> / 25, 12, 6, 3 IPS <PAL> CIF: 120, 60, 30, 15 IPS <NTSC> / 100, 50, 25, 12 IPS <PAL>
Image Quality Setting	Best, High, Normal and Basic
Hard Disk Storage	IDE type, ATA66, supported HDD * 1, support HDD capacity over 500GB
HDD Quick Cleaning	Quick clean up the "index system" of the recorded files. 500GB under 2 seconds
Recording Mode	Manual / Timer / Motion / Alarm / Remote
Refresh Rate	120 IPS for NTSC / 100 IPS for PAL
Audio I/O	2 audio inputs, 1 audio output (Mono)
R.E.T.R. (Remote Event Trigger Recording)	Yes
Motion Detection Area	16 × 12 grids per camera for all channels
Motion Detect Sensitivity	4 adjustable variables with precise calculation for motion detection
Pre-alarm Recording	Yes (8MB)
Backup Device	USB 1.1/ 2.0 flash drive, DVD writer and network
Web Transmitting / Compression Format	Motion JPEG
Ethernet	10/100 Base-T. Support remote control and live view via Ethernet.
Web Interface	Support licensed software AP and IE browser
Remote Alarm Notification	E-mail images, and upload images to FTP site's specific account
Network Connection	Support TCP/IP, PPPoE, DHCP and DDNS function
PTZ control	Support PELCO-D protocol
IR Transmitter	Yes

Specifications	CPD502A
Dwell Time (Sequential Channel Switch)	Programmable with adjustable dwell time
Alarm I/O	4 inputs, 1 output
Digital Zoom	2X digital zoom (live mode)
Key Lock	Yes
Video Loss Detection	Yes
Camera Title	Support up to 6 letters
Video Adjustable	Hue / Color / Contrast / Brightness
Date Display Format	YY/MM/DD, DD/MM/YY, MM/DD/YY, and Off
Power Source	DC 19V
Power Consumption	<42 W
Operating Temperature	10°C ~ 40°C (50°F~104°F)
Dimensions (mm)	375(W) × 61(H) × 281(D)
System Recovery	System auto recovery after power failure
Optional Peripheral	VGA converter

* The specification is subject to change without notice.